

# (12) UK Patent Application (19) GB (11) 2 308 034 (13) A

(43) Date of Printing by UK Office 11.06.1997

(21) Application No 9704593.4

(22) Date of Filing 20.09.1995

(30) Priority Data

(31) 9419106 (32) 22.09.1994 (33) GB

(86) International Application Data

PCT/GB95/02222 En 20.09.1995

(87) International Publication Data

WO96/09558 En 28.03.1996

(71) Applicant(s)

The Secretary of State for Defence

(Incorporated in the United Kingdom)

Defence Evaluation and Research Agency, DRA,  
FARNBOROUGH, Hants, GU14 6TD, United Kingdom

(72) Inventor(s)

Andrew Warren Houghton  
Christopher Deal Reeve

(51) INT CL<sup>6</sup>

G01S 3/46 3/04

(52) UK CL (Edition O )

H4D DFC DSC D265 D395 D41X D512

(56) Documents Cited by ISA

US 5296861 A US 4847862 A US 4845502 A

US 4652817 A

IEEE Transactions of Microwave Theory and  
Techniques, June 94 USA vol. 42, no. 6 ISSN  
0018-9480

(58) Field of Search by ISA

INT CL<sup>6</sup> G01S 3/04 3/46


(74) Agent and/or Address for Service

S R Skelton

PO Box 702, Directorate of Int Prop Rights,  
Formalities Section (Procurement Executive),  
Poplar 2, MOD Abbey Wood 19, BRISTOL, BS12 7DU,  
United Kingdom

## (54) Detection of spread spectrum signals

(57) A spread spectrum signal detection system comprising two spatially separated receivers, a correlator, such as a time integrating correlator employing acoustic-optic cells, which is connected to the outputs from the two receivers to produce a signal representative of the cross correlation function of the two spread spectrum signals, a filter arranged to transmit only the central portion of the cross correlation function and a signal processor to produce the cross spectral density and thereby determine the presence of the spread spectrum signal. The direction of arrival of the spread spectrum signal can be determined by measurement of the angle of the phase slope of the cross spectral density. The acoustic-optic cells can be Bragg cells. The output signal from one of the receivers can be applied to a first Bragg cell arranged to point modulate light from a laser light source, the output then being transmitted through a beam expander to a second Bragg cell to which the output signal from the second receiver can be applied, the output from the second Bragg cell then being detected by a photo-detector array. The output from the second Bragg cell can be spatially filtered by providing adjustable imaging optics arranged such that only light corresponding to the central portion of the cross correlation function is transmitted. The processor can be arranged to demodulate the signals to produce data corresponding to the central portion of the cross correlation function and to Fourier transform the data to produce the cross spectral density.

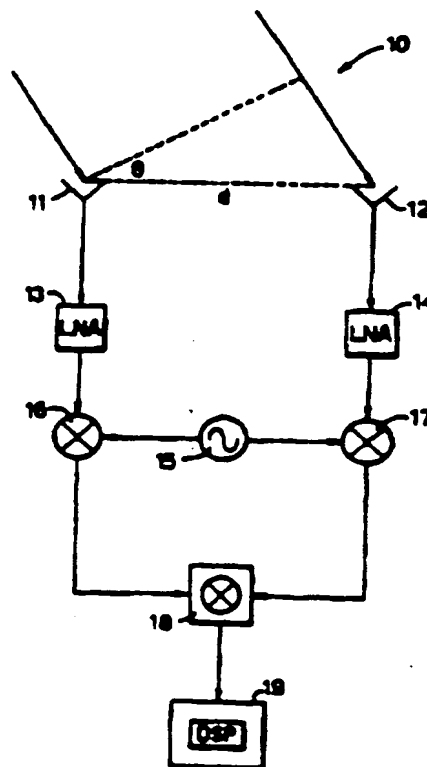

GB 2 308 034 A






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : G01S 3/46, 3/04		A1	(11) International Publication Number: WO 96/09558
			(43) International Publication Date: 28 March 1996 (28.03.96)
(21) International Application Number: PCT/GB95/02222		(81) Designated States: AU, CA, GB, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 20 September 1995 (20.09.95)			
(30) Priority Data: 9419106.1 22 September 1994 (22.09.94) GB		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant (for all designated States except US): THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; Defence Evaluation & Research Agency, DRA Farnborough, Hampshire GU14 6TD (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): HOUGHTON, Andrew, Warren [GB/GB]; Royal Naval Engineering College, Manadon, Plymouth PL5 3AQ (GB). REEVE, Christopher, Deal [GB/GB]; School of Electronic Communication and Electrical Engineering, University of Plymouth, Plymouth PL4 8AA (GB).			
(74) Agents: BECKHAM, Robert, William et al.; Defence Evaluation & Research Agency, Intellectual Property Dept., R69 Building, DRA Farnborough, Hampshire GU14 6TD (GB).			

(54) Title: DETECTION OF SPREAD SPECTRUM SIGNALS

## (57) Abstract

A spread spectrum signal detection system comprising two spatially separated receivers, a correlator, such as a time integrating correlator employing acousto-optic cells, which is connected to the outputs from the two receivers to produce a signal representative of the cross correlation function of the two spread spectrum signals, a filter arranged to transmit only the central portion of the cross correlation function and a signal processor to produce the cross spectral density and thereby determine the presence of the spread spectrum signal. The direction of arrival of the spread spectrum signal can be determined by measurement of the angle of the phase slope of the cross spectral density. The acousto-optic cells can be Bragg cells. The output signal from one of the receivers can be applied to a first Bragg cell arranged to point modulate light from a laser light source, the output then being transmitted through a beam expander to a second Bragg cell to which the output signal from the second receiver can be applied, the output from the second Bragg cell then being detected by a photo-detector array. The output from the second Bragg cell can be spatially filtered by providing adjustable imaging optics arranged such that only light corresponding to the central portion of the cross correlation function is transmitted. The processor can be arranged to demodulate the signals to produce data corresponding to the central portion of the cross correlation function and to Fourier transform the data to produce the cross spectral density.

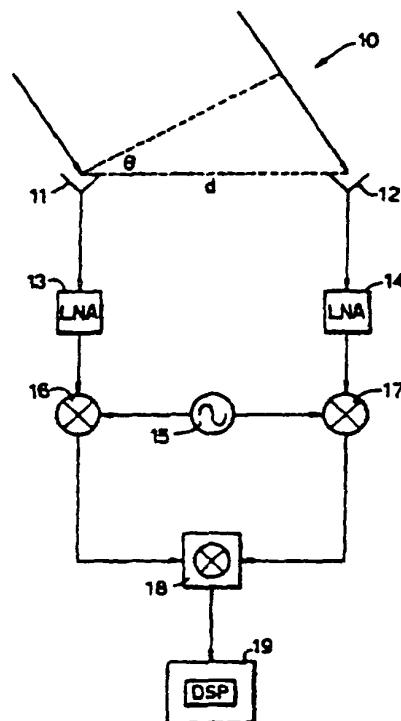

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Detection of Spread Spectrum Signals

The invention relates to the detection of low power spread spectrum signals as used, for example, in many modern radars and in particular though not exclusively to direction finders using the cross correlation of signals received from two spatially separated receivers.

Many modern radars use spread spectrum techniques. This enables them to achieve good range resolution with low power outputs, and it also gives them LPI (Low Probability of Intercept) properties. The radar receiver, with its matched filter, can make use of the full processing gain available from a pulse of CW signal with large time-bandwidth product. An ESM receiver can not normally take advantage of this potential processing gain, and is additionally hampered by having to have a relatively wide bandwidth with a consequent noise penalty.

If a system attempting to detect and locate spread spectrum signals uses two spatially separated receivers and cross correlates the two received signals, it can achieve much of the processing gain available to the matched filter receiver. The two signals will contain both antenna noise and internal receiver noise. The internal noise in the two receivers will be independent and will not correlate. Much of the two sets of antenna noise comes from the same sources. However, if these sources are spatially distributed then the signals from these sources arrive at the two antennas with a distribution of time delays, and the antenna noise signals are effectively uncorrelated. Any fixed signal source (emitting a spread spectrum signal) will, however, emit a signal that will be present in both receiver inputs with a single fixed time

delay. The cross correlation function of the two receiver outputs will contain the autocorrelation function of the signal coming from any fixed source, shifted along the time axis according to the time difference of arrival at the antennas. It will also contain two cross correlations of the signal in one receiver with the noise in the other, and the cross correlation of the two sets of noise. For large input signal to noise ratios the noise-noise cross correlation will be insignificant and the correlator output will effectively contain the signal autocorrelation function plus the two signal-noise cross correlations.

However, we are generally more interested in the case where the input signal to noise ratio is small. The noise-noise cross correlation will then dominate and the system will perform much worse than the matched filter, unless we can find some other way of rejecting a significant portion of the noise. This is possible. If the noise signals in the two receivers are indeed uncorrelated, then the signal-noise and noise-noise cross correlations will simply be noise signals spread, more or less uniformly, over the full length of the cross correlation function. However, the signal autocorrelation function will, for a spread spectrum signal be concentrated in the centre. If we take just the central portion of the cross correlation function, therefore, we can reject most of the noise energy present. This does not help us if we are concerned with making measurements, such as threshold detection, on the time domain cross correlation function.

It should also be noted that, because it has no a-priori timing information, the ESM system cannot integrate over several pulses in the way that the radar can.

If we wish to direction find on a fixed signal source, we can obtain the time difference of arrival at the antennas by direct measurements on the cross correlation function. However the resolution of this is limited by the width of the main lobe of the signal auto correlation function, which is approximately the inverse of the signal bandwidth. For example, a system using a baseline of 50 m to direction find on a signal of bandwidth 10 MHz would have a bearing resolution of about  $34^\circ$  at best. Such direct measurement of the position of the autocorrelation function using threshold detection is, of course, very crude and fails to make use of the phase information present in the cross correlation function.

The object of the invention is to provide a cross correlation receiver detection system which is capable of providing improved detection and substantially greater positional accuracy than hitherto possible.

The invention provides a spread spectrum signal detection system comprising:

two spatially separated receivers for detecting the spread spectrum signal;

a correlator having first and second inputs connected to the outputs from the two receivers to produce at an output thereof a signal representative of the cross correlation function of the spread spectrum signals received by the two receivers;

a filter having an input connected to the output of the correlator arranged to transmit to an output thereof only the central portion of the cross correlation function; and

a signal processor connected to the output from the filter to produce the cross spectral density and thereby determine the presence of the spread spectrum signal.

In the preferred arrangement of the invention the direction of arrival of the spread spectrum signal at the detection system can be determined by measurement of the angle of the phase slope of the cross spectral density.

In the preferred arrangement the correlator is a time integrating correlator employing acousto-optic cells. The acousto-optic cells are preferably Bragg cells. In a convenient arrangement the output signal from one of the receivers is applied to a first Bragg cell arranged to point modulate light from a laser light source, the modulated light output from the first Bragg cell is then transmitted through a beam expander to a second Bragg cell to which the output signal from the second receiver is applied, the modulated output light from the second Bragg cell then being detected by a photo-detector array.

Preferably, in order to reduce the computational demands on the system, the modulated light output from the second Bragg cell is spatially filtered by providing imaging optics arranged such that only light corresponding to the central portion of the cross correlation function is transmitted. Advantageously there is provided means to adjust the



imaging optics to ensure that only the light corresponding to the central portion of the cross correlation function is transmitted through the spatial filter.

The output signals from each diode of the photo-diode array are preferably connected to a digital signal processor arranged firstly to demodulate the signals to produce data corresponding to the central portion of the cross correlation function and secondly to Fourier transform the data to produce the cross spectral density.

The Fourier transform is conveniently done by means of a fast Fourier transformer (FFT).

The detection system is advantageously arranged such that a peak measurement in the cross spectral density leads to an output signal indicating presence of a target signal.

For target bearing information the DSP is arranged such that the angle of the phase slope of the cross spectral data is made. Preferably a least squares method is applied to determine the phase slope.

The invention will now be described by way of example with reference to the accompanying Drawings of which:

Figure 1 is a block diagram of a two receiver correlation signal detection and direction finder;

Figure 2 shows a practical time domain correlator using Bragg cells;

Figure 3 shows an autocorrelation function of one receiver output;

Figure 4 shows the cross correlation of the outputs from the two receivers;

Figures 5 and 6 show the effect of zooming in on the centres of the functions shown in Figures 3 and 4 respectively;

Figure 7 shows the power spectral density corresponding to the autocorrelation function shown in Figure 3;

Figure 8 shows the time domain filtered cross spectral density obtained from the Figure 6 data; and

Figure 9 shows the phase slope of the Figure 8 data as used to determine the direction of arrival of a received signal.

Figure 1 illustrates a direction finder in which a weak spread spectrum signal 10 arrives at two detectors from an angle  $\theta$ . The detectors comprise antennas 11, 12, spatially separated by a distance  $d$ , and respective low noise RF amplifiers 13, 14. The output signals from the amplifiers 13, 14 are mixed with the output signal from a stable low noise oscillator 15 in mixers 16, 17 and the output signals from the mixers are cross-correlated in cross correlator 18. The output signal from the cross correlator 18 is then connected to a digital signal processor (DSP) 19. When the cross correlation of the outputs of the 2 receivers is formed, the signal-signal cross correlation, for a spread

spectrum signal 10, is concentrated almost totally in small regions in the centre of the cross correlation function while noise terms are spread out over the full range of the total cross correlation function. Once the spread spectrum signal has been detected the angle of arrival  $\theta$  can be determined if the time difference of arrival at the two receivers can be obtained. This time difference is manifested in the cross correlation function as a shift in the position of the correlation peak from the centre. Unfortunately this shift generally cannot be measured with sufficient accuracy to be useful.

A time shift in the time domain cross correlation function is equivalent to a linear phase slope in the frequency domain cross spectral density. Thus, if the complex cross spectral density is stored digitally then this phase slope can be extracted to give the angle of arrival  $\theta$ . First, the part of the cross spectral density containing the signal must be established. This is done by threshold detection of the magnitude. Second, the phase terms need to be unwrapped by means of an appropriate algorithm which adds or subtracts  $2\pi$  as appropriate when a sudden phase change is detected between successive stored points. The inventor has shown that the unwrapping algorithm can fail, particularly for weak signals, if the cross spectral density is not time domain filtered.

To sample the signals from the two receivers and perform the necessary cross correlations digitally in real time may not be feasible, especially if we wish to design a system with large channel bandwidths and long sample lengths. For example: a channel bandwidth of 1 GHz and a sample length of 50  $\mu$ s would require analogue to digital conversion at a sampling frequency of 2 GHz and data sets of 50,000 points.

Acousto-optic correlators may provide the answer to the problem of forming the initial cross correlation function. The fact that we then only want to sample a relatively small centre portion of the cross correlation function is very convenient since this means that the number of data points we have to extract for further processing is very much reduced.

Figure 2 shows a time integrating correlator implementation for use as the cross correlator 18 in Figure 1. This arrangement of correlator is described by Vanderlugt "Optical Signal Processing", Wiley Interscience, 1992 pp520-526. A laser light source 20 is shown incident on a first Bragg cell 21, driven by a first ( $S_1(t)$ ) of the two signals to be correlated. This produces point modulation of the laser light which is expanded by a beam expander 22 to illuminate a second Bragg cell 23 driven by the second signal  $S_2(t)$ . Both signals  $S_1(t)$  and  $S_2(t)$  have a bias 24, 25 added before connection to the respective Bragg cells. In addition the second signal  $S_2(t)$  is modulated by an oscillator signal of frequency  $\omega_c$  in a mixer 26. The modulated light from the second Bragg cell 23 is then transmitted through a spatial filter 27, situated between converging lenses 28, 29, to a photodetector array 210. The output signals from the array 210 are then connected to a DSP 211. In the DSP 211 the Fourier transform, obtained by a fast Fourier transform processor (FFT), of the truncated cross correlation function is used to produce the time domain filtered cross spectral density. A least squares or other suitable technique is then used to determine the phase slope of the cross spectral density and hence the direction of arrival of the detected signal.

Vanderlugt shows that the time integrated light intensity at the plane of the photodetector array contains a spatially invariant term which is proportional to the integration time and the cross correlation function of the two input signals imposed as double sideband suppressed carrier modulation of a spatial carrier. This correlator is ideal for the required process of windowing the centre portion of the cross correlation function. The spatial dimensions of the cross correlation function are controlled by adjustment of the imaging optics so that the required centre portion falls on the photodetector array. The spatial function is then sampled by the array and all further processing performed digitally, including demodulating the spatial signal to recover the correlation function from the carrier.

This arrangement takes advantage of the speed of optical signal processing for the correlation and the flexibility of digital signal processing once the sets of data points has been reduced to manageable numbers.

In the proposed implementation of the Figure 2 arrangement a Fairchild 2048 element CCD linescan camera is used, controlled by and delivering its data to, a TMS320C30 based framegrabber and digital signal processing board mounted in a host PC.

In this arrangement the limited dynamic range of the acousto-optic Bragg cells need not be a problem. Where the system is intended to look for signals below the noise level, the system would be set up with RF and IF gains such that the standard deviation of the noise is approximately one third of the amplitude range of the correlator inputs. Short high power

pulses will be severely clipped. This goes some way towards eliminating the non LPI pulses that would be detected by a conventional system, although they would of course be better excluded by the use of notch filters to block known signals.

Simulation of this system has shown that it should be highly effective against LPI radars. By use of the time domain filtered cross spectral density, such a system should, in addition to detecting spread spectrum signals at power levels well below the sensitivities of current ESM systems, be able to direction find on such signals.

One type of radar having LPI properties is the FMCW radar, an example of which is the PILOT navigation radar which operates at about 9GHz. This is described in Beasley PDL and Stove AG:

"PILOT - an example of advanced FMCW techniques", IEE Colloq, an "High time-bandwidth product waveforms in radar and sonar", IEE Digest No 093, 1991. .

PILOT employs a sawtooth frequency sweep of 50MHz with a time period of 1ms within a bandwidth of 1GHz. If a cross correlating detection system uses a sample time of 50  $\mu$ s then it can only 'see' a frequency sweep of 2.5MHz. Using a time domain correlator as proposed in this invention, it can be shown that the time domain filtered Cross Spectral Density gives a significantly higher output signal to noise ratio than the cross correlation function. Hence use of the cross spectral density gives increased detectability of the FMCW signal at lower powers. In addition, detection improves with longer integration time.

The inventor has shown that the main peak of the autocorrelation

function of an LPI radar pulse is very narrow, the time shift between the two inputs to the receivers is also small, and the noise in the cross correlation function is spread across the whole width of the function. Therefore much of the noise can be eliminated by simply rejecting all but the centre portion of the cross correlation function by use of the spatial filter 27. Then, taking the Fourier transform of this windowed function produces the time domain filtered cross spectral density. It has further been shown that for short samples or systems in which the noise bandwidth is much greater than the bandwidth of the signal within the sample, the time domain filtered cross spectral density can have a significantly higher signal to noise ratio than the cross correlation function. Simulation has demonstrated that measurement of the phase slope of the relevant part of the time domain filtered cross spectral density can give accurate direction finding. This direction finding is especially accurate if a number of successive cross correlation functions are coherently summed, simulating the effect of a long sample length, before formation of the time domain filtered cross spectral density.

If a radar uses long spread spectrum pulses, then an ESM system with no processing gain will have no range advantage, even if it uses a channelled receiver with a large number of narrow channels. A crystal video receiver will be much more sensitive but will still not achieve a useful range advantage over an LPI radar, even when it has a-priori knowledge of the pulse length, allowing it to optimise the video bandwidth. It has been shown that a dual receiver cross correlating ESM system, which requires virtually no a-priori information, will always perform significantly better than a crystal video receiver. If the ESM

system noise bandwidth is more than 12 times greater than the bandwidth of the signal contained within a sample, then use of the time domain filtered cross spectral density can offer greater sensitivity. Use of this cross spectral density also enables discrimination between signals of different frequencies within the same RF channel and extremely accurate direction finding.

A simulation model has been developed to illustrate the invention.

The model parameters were: a receiver noise bandwidth of 80 MHz, an FMCW signal sweeping up through a bandwidth of 10 MHz in 0.5ms, a receiver output signal to noise ratio of -13dB, and an antenna separation of 50 m. Ten cross correlations were performed on successive 50  $\mu$ s samples and summed. Although the resulting cross correlation function has a very low signal to noise ratio, when viewed in the time domain, direction finding using the phase slope of the time domain filtered CSD gave a direction of arrival measurement, on a source at 30° from the two element array broadside, with an error of less than 0.5°. The following Figures demonstrate the process.

Figure 3 shows the autocorrelation function of one of the receiver outputs for comparison with the cross correlation function. This autocorrelation function is clearly dominated by the very large noise autocorrelation peak 30.

Figure 4 shows the cross correlation of the two receiver outputs, on the same scale as Figure 3. The components 40 due to the noise are now spread over the full width of the function.



Figures 5 and 6 show the result of zooming in on the centres of the autocorrelation function shown in Figure 3 and the cross correlation function shown in Figure 4 by a factor of 64. 50 is the autocorrelation peak. While it is apparent that the central lobe 60 of the cross correlation function does contain a time shift, estimation of this shift directly by threshold detection would give very poor results.

Figure 7 shows the power spectral density 70 obtained simply by taking the Fourier transform of the autocorrelation function shown in Figure 3. This is basically the same as a straight forward FFT analysis of one receiver output. It is clearly not very useful.

Figure 8 shows the magnitude of the time domain filtered cross spectral density obtained by taking the fast Fourier transform (FFT) of the truncated cross correlation function shown in Figure 6. The 10 MHz bandwidth signal 80 now shows up very clearly.

Figure 9 shows the unwrapped phase 90 of the time domain filtered CSD, with a straight line 91 fitted to the section within the signal band. From the slope of this straight line we can calculate the time shift in the cross correlation function and hence the direction of arrival of the signal. The actual time delay between the two signals in the model correspond to a direction of arrival of  $30^\circ$ . The direction of arrival calculated from the slope of the straight line in Figure 9 was  $30.3^\circ$ .

Although other types of acousto-optic correlator may be used, such as a space integrating correlator or a joint transform correlator, the time

integrating correlator described is particularly beneficial for real time data processing using only the centre portion of the cross correlation function.

**Claims**

1. A spread spectrum signal detection system comprising:
  - a) two spatially separated receivers for detecting the spread spectrum signal;
  - b) a correlator having first and second inputs connected to the outputs from the two receivers to produce at an output thereof a signal representative of the cross correlation function of the spread spectrum signals received by the two receivers;
  - c) a filter having an input connected to the output of the correlator arranged to transmit to an output thereof only the central portion of the cross correlation function; and
  - d) a signal processor connected to the output from the filter to produce the cross spectral density and thereby determine the presence of the spread spectrum signal.
2. A spread spectrum signal detection system as claimed in claim 1 wherein the direction of arrival of the spread spectrum signal at the detection system is determined by measurement of the angle of the phase slope of the cross spectral density.
3. A spread spectrum signal detection system as claimed in claim 1 or 2 wherein the correlator is a time integrating correlator employing acousto-optic cells.
4. A spread spectrum signal detection system as claimed in claim 3 wherein the acousto-optic cells are Bragg cells.

5. A spread spectrum signal detection system as claimed in claim 4 wherein the output signal from one of the receivers is applied to a first Bragg cell arranged to point modulate light from a laser light source, the modulated light output from the first Bragg cell is then transmitted through a beam expander to a second Bragg cell to which the output signal from the second receiver is applied, the modulated output light from the second Bragg cell then being detected by a photo-detector array.

6. A spread spectrum signal detection system as claimed in claim 5 the modulated light output from the second Bragg cell is spatially filtered by providing imaging optics arranged such that only light corresponding to the central portion of the cross correlation function is transmitted in order to reduce the computational demands on the system.


7. A spread spectrum signal detection system as claimed in claim 6 wherein there is provided means to adjust the imaging optics to ensure that only the light corresponding to the central portion of the cross correlation function is transmitted through the spatial filter.

8. A spread spectrum signal detection system as claimed in claim 5 wherein the output signals from each detector of the photo-detector array are connected to a digital signal processor (DSP) arranged firstly to demodulate the signals to produce data corresponding to the central portion of the cross correlation function and secondly to Fourier transform the data to produce the cross spectral density.

9. A spread spectrum signal detection system as claimed in claim 8 wherein the Fourier transform is done by means of a fast Fourier transformer (FFT).
10. A spread spectrum signal detection system as claimed in any one preceding claim wherein the detection system is arranged such that a peak measurement in the cross spectral density leads to an output signal indicating presence of a target signal.
11. A spread spectrum signal detection system as claimed in claim 8 wherein for target bearing information the DSP is arranged such that the angle of the phase slope of the cross spectral data is determined.
12. A spread spectrum signal detection system as claimed in claim 11 wherein a least squares method is applied to determine the phase slope.

1/4

Fig.1.

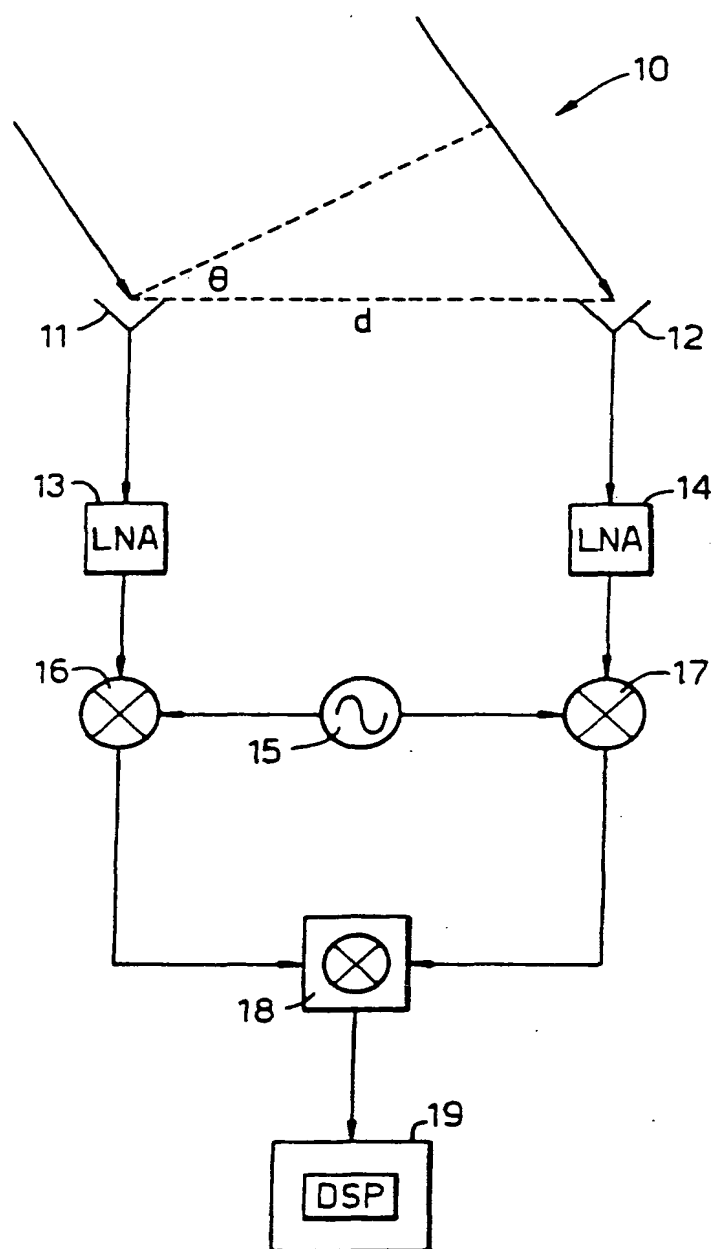

2/4

Fig.2.

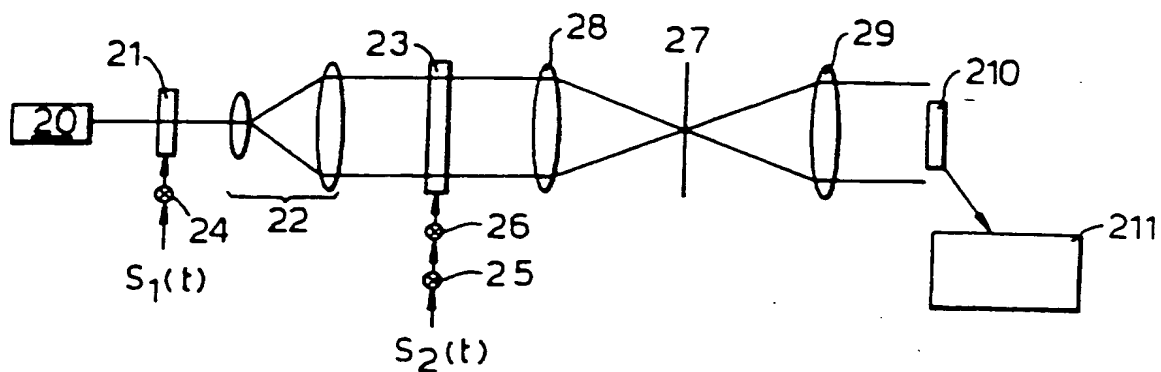


Fig.3.


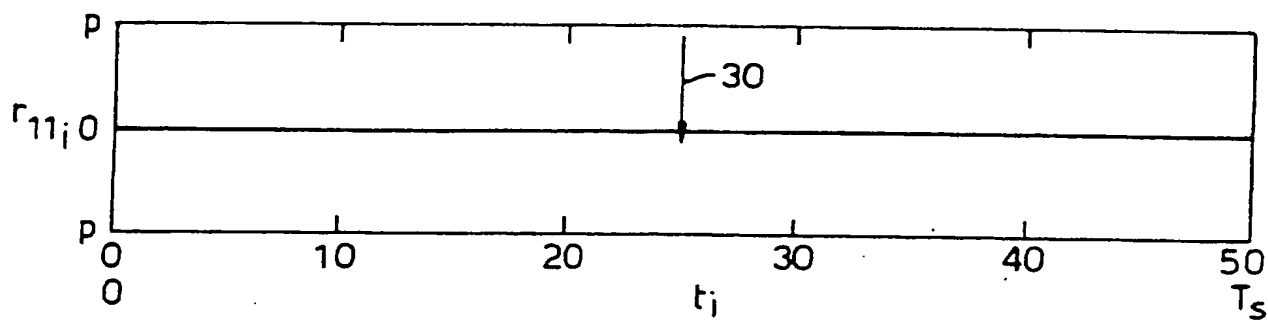


Fig.4.

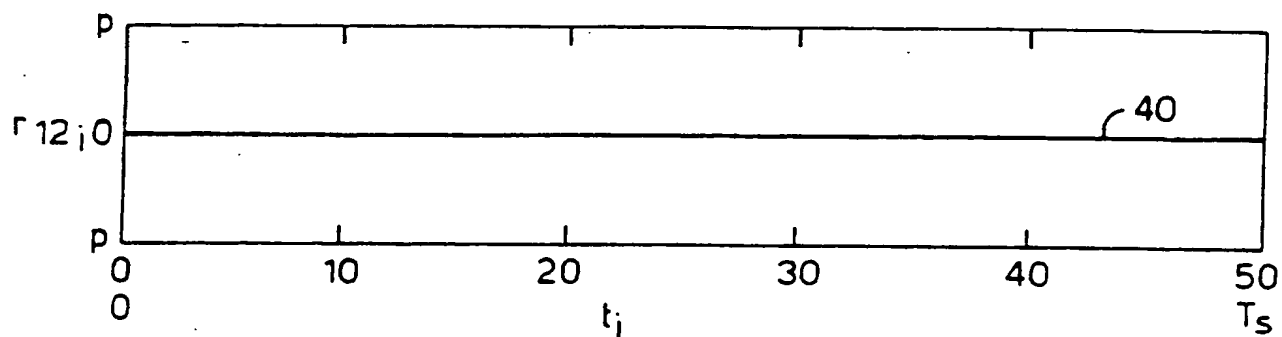

3/4

Fig.5.

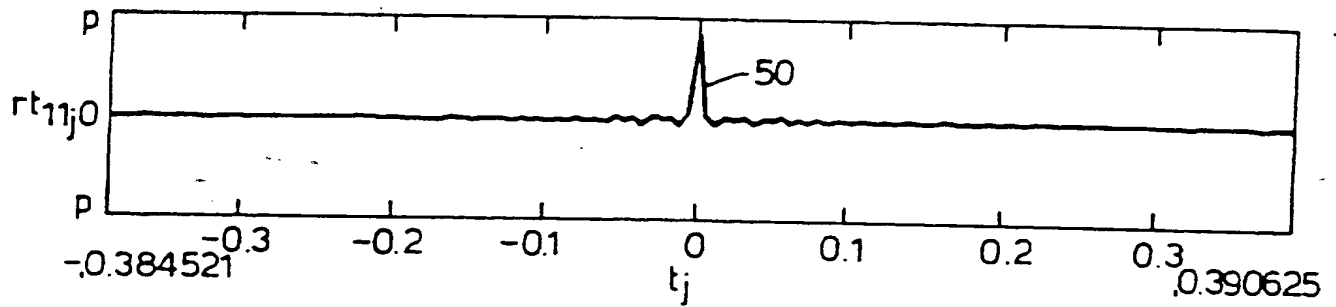


Fig.6.

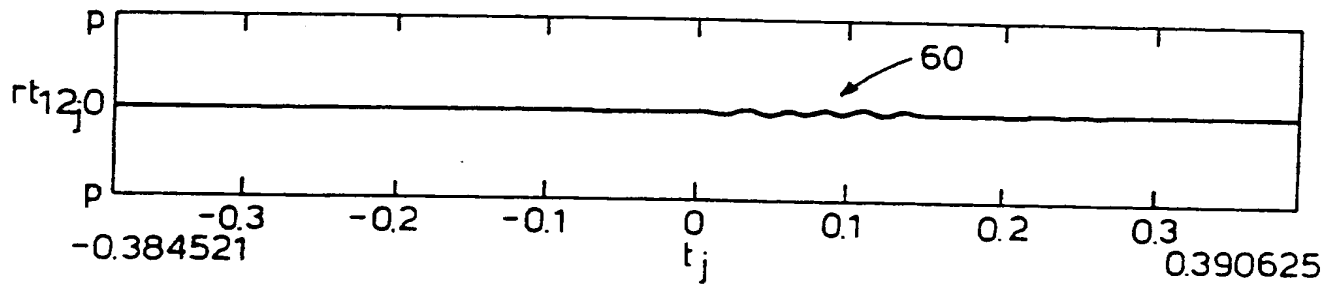


Fig.7.


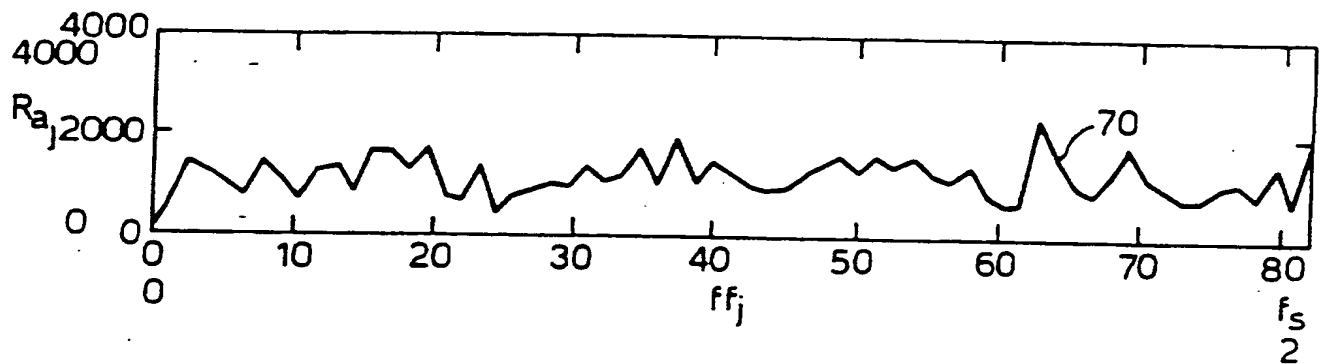



Fig.8.



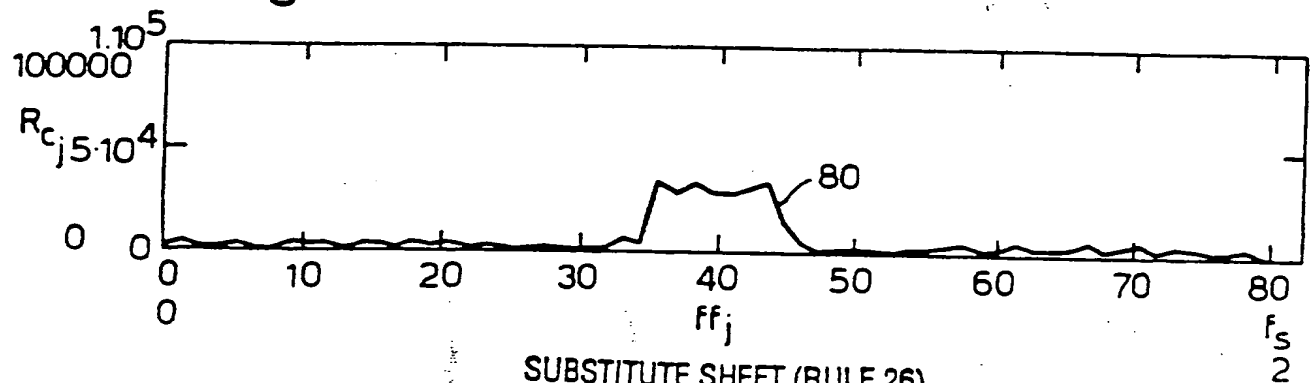

4/4

Fig.9.

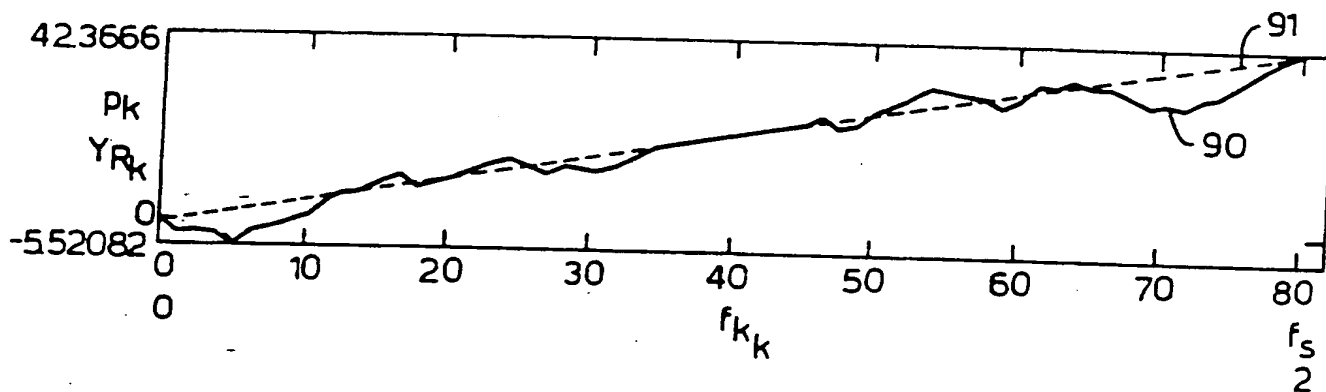

## INTERNATIONAL SEARCH REPORT

Inter. .onal Application No

PCT/GB 95/02222

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G01S3/46 G01S3/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01S H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, JUNE 1994, USA, vol. 42, no. 6, ISSN 0018-9480, pages 951-955, SOARES S ET AL 'A wide band tracking delay for radio astronomy' see abstract; figure 1 ---	1
A	US,A,4 845 502 (CARR JAMES L ET AL) 4 July 1989 see abstract; figure 2 ---	1
A	US,A,4 847 862 (BRAISTED PAUL E ET AL) 11 July 1989 see abstract; figure 1 ---	1
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 January 1996

Date of mailing of the international search report

- 5. 02. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Haffner, R

# INTERNATIONAL SEARCH REPORT

Intern. Patent Application No.

PCT/GB 95/02222

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,5 296 861 (KNIGHT DONALD T) 22 March 1994 see abstract; figure 1 ---	1
A	US,A,4 652 817 (YARBOROUGH JOHN R ET AL) 24 March 1987 see column 2, line 28 - line 58; figure 2 -----	1

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

Int. Appl. No.  
**PCT/GB 95/02222**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4845502	04-07-89	NONE	
US-A-4847862	11-07-89	CA-A- 1333295	29-11-94
		EP-A- 0336418	11-10-89
		JP-A- 1312484	18-12-89
		JP-B- 7111457	29-11-95
US-A-5296861	22-03-94	NONE	
US-A-4652817	24-03-87	NONE	